
Product Specifications

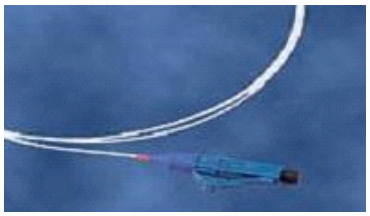

6695511-2 | FOMM50 PIGTAIL 0.9T LC/PC OM3 2M

Body Features

Boot Color (Left)	Beige
Boot Type (Left)	Short
Cable Color	Aqua

Configuration Features

Number of Fibers	1
Exit Angle to Exit Angle	180° to pigtail

Dimensions

Assembly Length	2.00 m | 6.56 ft
Outside Cable Diameter	.90 mm

Industry Standards

Flammability Rating	LSZH (Low Smoke Zero Halogen)

Product Availability

Region	Australia/New Zealand | EMEA

Product Type Features

Product Type	Pigtail
Connector Type (End B)	Stub Tail
Fiber Type	OM3
Ferrule Material	Ceramic
Fiber Cable Buffering	Tight buffer
Fiber Diameter	50/125 µm
Optical Mode	Multimode

Signal Characteristics

Return Loss, minimum	30 dB

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant

* Footnotes

Assembly Length	Assembly length includes the breakout lengths

©2016 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.
All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: June 22, 2016

Return Loss, minimum	Applies to 1310nm and 1550nm wavelengths

©2016 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope.
All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: June 22, 2016